




PRODUCT DIMENSIONS & SPECIFICATIONS

DX-TREME CR SERIES DEDICATED HORIZONTAL PLENUM COIL WITH BUILT-IN AUXILIARY DRAIN PAN

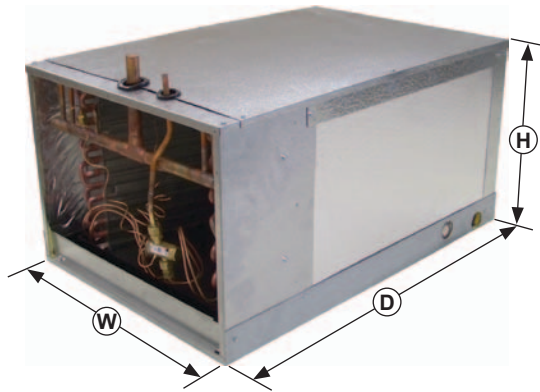

STANDARD SPECIFICATIONS

- Rifled copper tubing, enhanced aluminum fins
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed
- Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2- 3 ton & 7/8" ODS on 3-1/2 - 5 ton.
- Externally mounted flowrater body or internally mounted factory-installed TXV
- Schrader valve on liquid line for hiss-testing
- Refrigerant lines exit top of coil
- Split access doors on top of coil for easy service
- Plastic drain pans (primary and secondary)
- Built-in auxiliary drain pan with 3/4" FPT
- Plenum sides and end constructed of foil-backed faced fiberglass ductboard. Plenum top and bottom constructed of galvanized steel
- AHRI certifiable with all brands of A/C and heat pump systems
- ETL listed for use with R-22 and R-410a when proper metering device is used
- Patent pending design
- Ten-year limited warranty with registration

Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

COIL MODEL	R410a PISTON SIZE	DIMENSIONS			SHIPPING INFORMATION		
		CABINET WIDTH [W]"	CABINET DEPTH [D]"	CABINET HEIGHT [H]"	SHIPPING WEIGHT (LBS)		SKID QTY
					2 ROW	3 ROW	
CR24A*	0.055	20-1/2	31	15-1/2	42	51	8
CR24B*	0.055	20-1/2	31	19-1/2	47	56	8
CR24C*	0.055	20-1/2	31	23-1/2	47	56	8
CR30A*	0.059	20-1/2	31	15-1/2	49	58	8
CR30B*	0.059	20-1/2	31	19-1/2	55	66	8
CR30C*	0.059	20-1/2	31	23-1/2	55	66	8
CR36A*	0.068	20-1/2	31	15-1/2	57	69	8
CR36B*	0.068	20-1/2	31	19-1/2	57	69	8
CR36C*	0.068	20-1/2	31	23-1/2	57	69	8
CR42A*	0.074	20-1/2	40	19-1/2	62	75	8
CR42B*	0.074	20-1/2	40	23-1/2	62	75	8
CR42C*	0.074	20-1/2	40	25-1/2	67	80	8
CR48A*	0.08	20-1/2	40	23-1/2	73	87	8
CR48B*	0.08	20-1/2	40	25-1/2	76	92	8
CR60A*	0.089	20-1/2	40	23-1/2	124	149	8
CR60B*	0.089	20-1/2	40	25-1/2	125	150	8

Phone: 281.441.6500
Toll Free: 800.423.9007
Fax: 281.441.6510
www.aspenmfg.com



* For complete warranty details visit www.aspenmfg.com.